



(43) International Publication Date
3 February 2005 (03.02.2005)


PCT

(10) International Publication Number
WO 2005/010859 A1

- (51) **International Patent Classification⁷:** G09G 3/36
- (21) **International Application Number:** PCT/IB2004/051304
- (22) **International Filing Date:** 28 July 2004 (28.07.2004)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
PCT/IB03/03375 30 July 2003 (30.07.2003) IB
- (71) **Applicant (for all designated States except US):** KONIN-
KLJKE PHILIPS ELECTRONICS N.V. [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** NAGAI, Hajime
[JP/JP]; c/o Philips Japan, Ltd., Philips Bldg., 2-13-37,
Kohnan, Minato-ku, Tokyo 108-8507 (JP). WATSUDA,
Hiroyumi [JP/JP]; c/o Philips Japan, Ltd., Philips Bldg.,
2-13-37 Kohnan, Minato-ku, Tokyo 108-8507 (JP).
- (74) **Agents:** TSUGARU, Susumu et al.; c/o Philips Japan,
Ltd., Philips Bldg., 2-13-37, Kohnan, Minato-ku, Tokyo
108-8507 (JP).
- (81) **Designated States (unless otherwise indicated, for every
kind of national protection available):** AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.
- (84) **Designated States (unless otherwise indicated, for every
kind of regional protection available):** ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

- (54) Title:** VOLTAGE SUPPLYING DEVICE

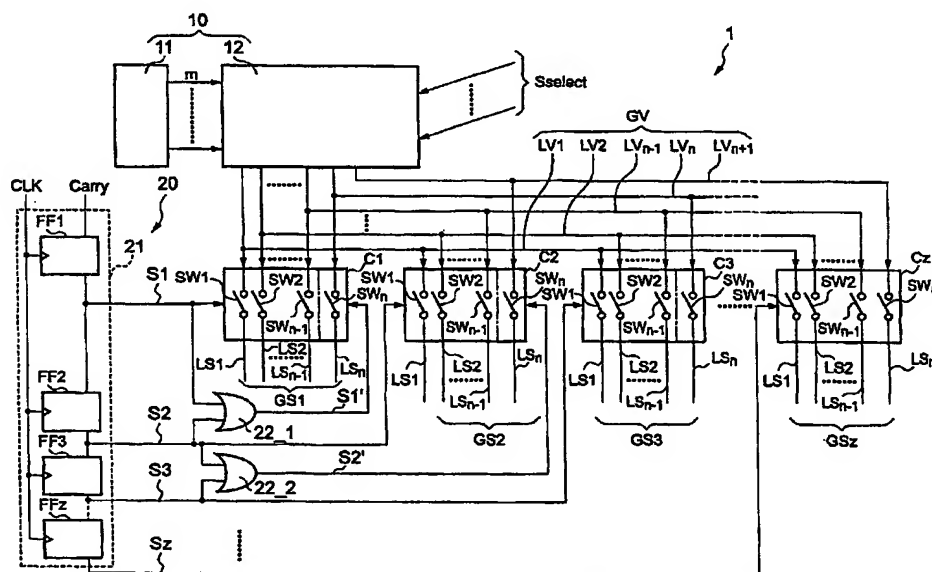

- (S7) Abstract:** A voltage supplying device (1) comprising a video line (LV1), a video line (LVn), a source line (LS1) of a source line group (GS1) supplied with a gray scale voltage through the video line (LV1), a source line (LSn) of a source line group (GS1) supplied with a gray scale voltage through the video line (LVn), a source line (LS1) of a source line group (GS2) supplied with a voltage through the video line (LV1), and a controlling means for continuing to supply the source line (LSn) of the source line group (GS1) during a transition from a state in which the source line (LS1) of a source line group (GS1) is supplied with a voltage to a state in which the source line (LSn) of a source line group (GS1) is supplied with a voltage.



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.